

Single Switch Module T1

Single Switch Module T1

Aqara Single Switch Module T1 (With Neutral), with ZigBee 3.0 module, can control the power supply of the appliance like lights, fans etc. It can also work as ZigBee signal repeater which can extend the signal coverage in the network. Working with a Hub, it can linkage other devices to achive variety of automation




Single Switch Module T1 (No Neutral)




Single Switch Module T1 (with Neutral)

	Single Relay (N, L)	Single Relay (L)
Input Voltage	100-240V AC 50/60Hz	100-240V AC 50/60Hz
Input Current	MAX 10A	MAX 5A
Output	100-240V AC 50/60Hz, MAX 10A	100-240V AC 50/60Hz, MAX 5A
Operating Temperature	0°C ~40°C (No Condensation)	0°C ~40°C (No Condensation)
Operating Humidity	5%- 95% RH, (No Condensation)	5%- 95% RH, (No Condensation)
Wireless Protocol	Zigbee3.0	Zigbee3.0
Antenna	External	External
Transmitted Power	10dBm/20dBm	10dBm

Features

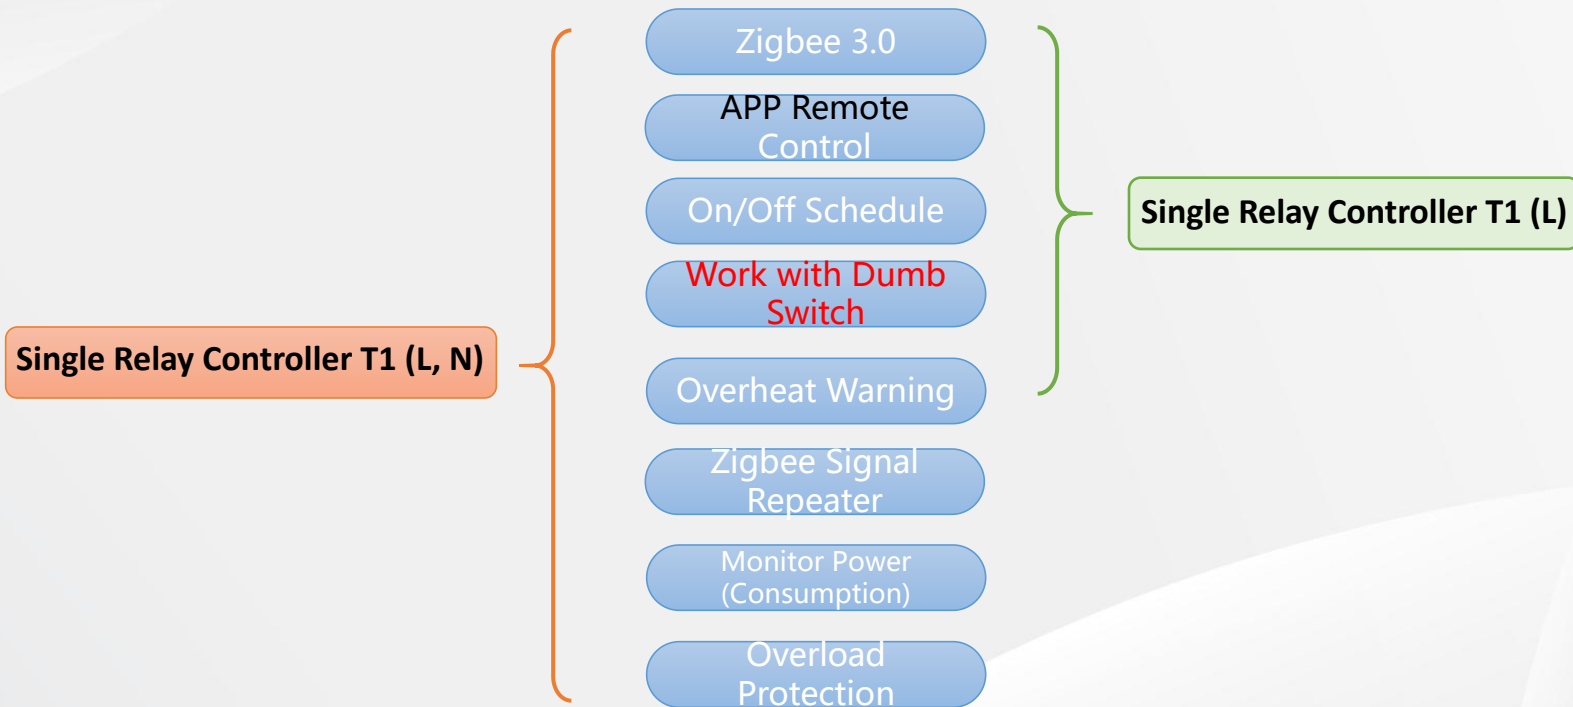

Application Scenarios

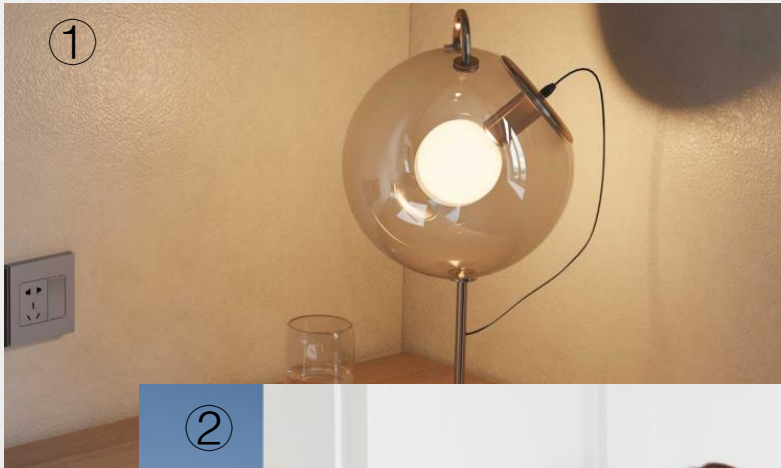


1. Install the relay controller in wall box to make dumb wall socket smart.

2. Install the relay controller controller in wall box to make dumb switch smart.


3. Install the relay controller in the ceiling to make common light smart.



Installation

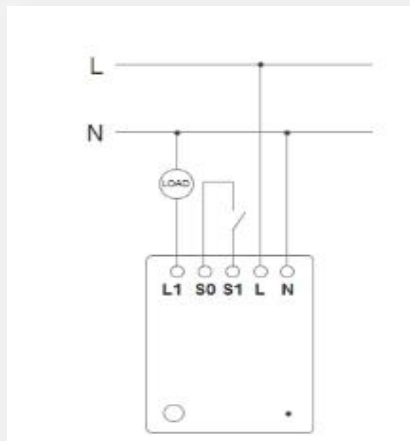


L1 → Load light
S0 & S1 → Dumb switch
L → Live Line
N → Neutral Line

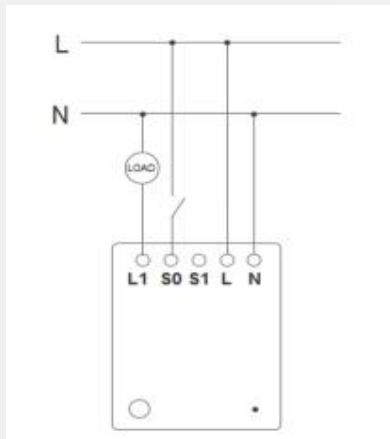

L1 → Load light
S0 → Dumb switch
L → Live Line
N → Neutral Line

three way switch

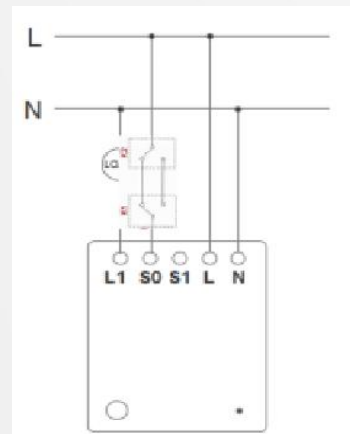

L1 → Load light
S0 → Dumb switch
L → Live Line
N → Neutral Line

Uses can control the light wirelessly without S1 and S0 connected.

*Please install the device somewhere people can't easily reach to avoid touching.

*All poles of the device are of strong power. Please do not touch them directly.!

Thank you